

5

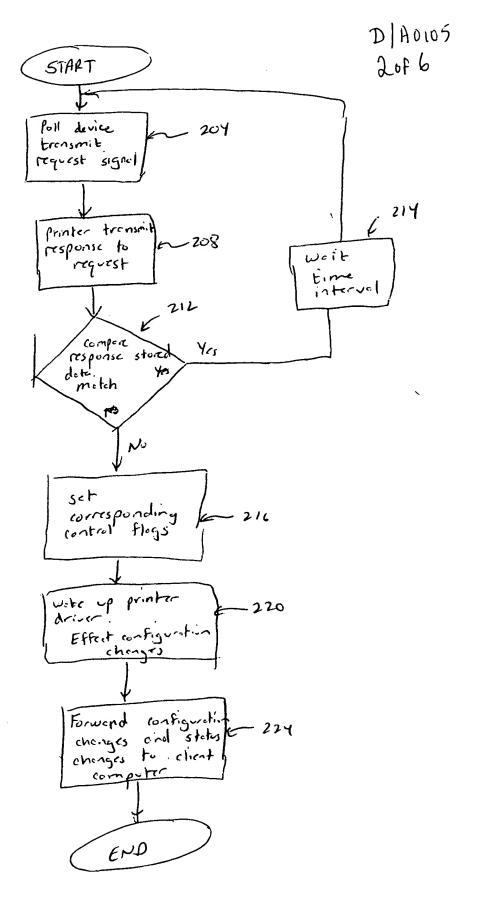


Fig 2


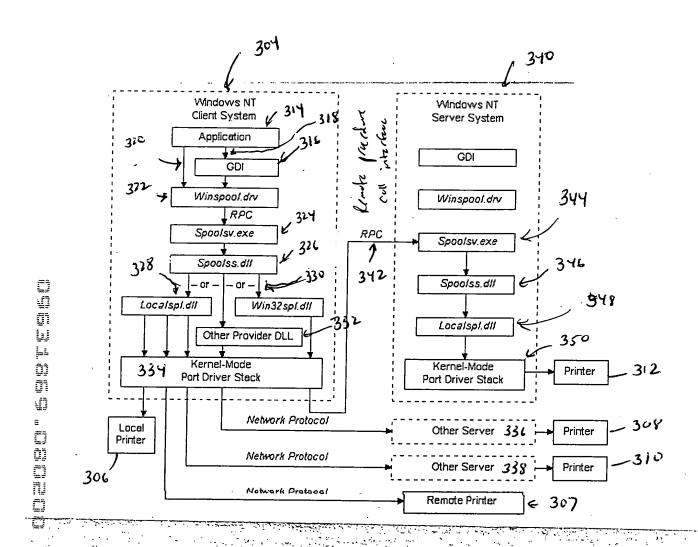


Fig 3

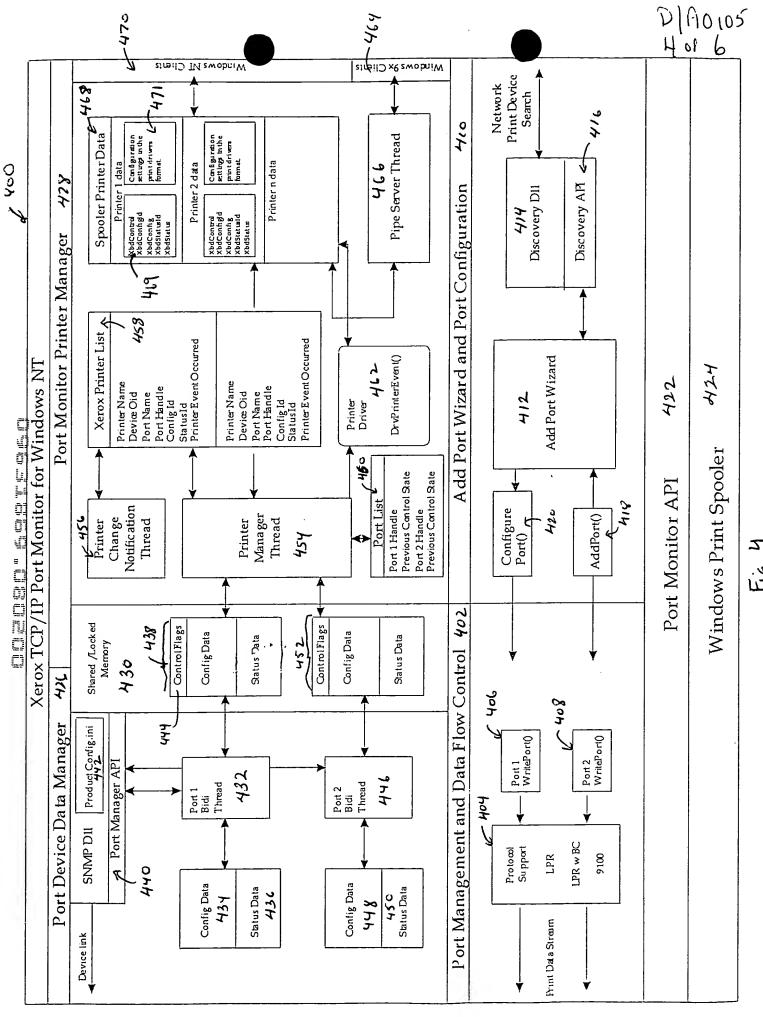

下(分) 12

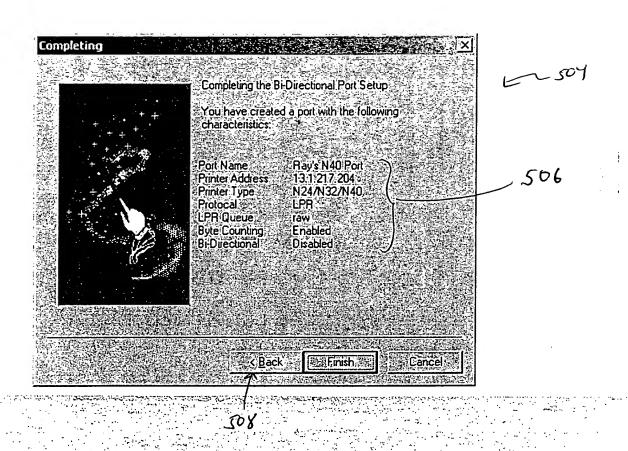


Fig 5

Xerox TCP/IP Port - Configuration	a de la companya de l
Port Name N40 Webster 1	,
Printer Name or IP Address 13.250.85.238	0 - 64
Timeout Setting  Select the maximum time to wait for the printer to respond	cr 516
2 Mrules	
Protocal C Lpr	
Raw Port Number 9100	
Lpi Settings  Lpi Queue Name	
☐: Lpr byte counting enabled	
Bi-directional Seltings  ☐ Bi-directional communication enabled  ☐ 52-(	7 520
Update configuration every 30 seconds	320
Updale status every 10 seconds	}
SNMP Community Name public	
About Cancel Cancel	

Fig6